$\frac{TEMPEST\ TORCH}{TEMPEST\ TORCH}$

Gas Lamp by Travis Industries





•

TEMPESTIORCH

TRAVIS INDUSTRIES



THE AWARD WINNING TEMPEST TORCH



Gas Lamps By Travis Industries



Breaking the barriers of standard torch design, Travis Industries proudly unveils the Tempest Torch[™] - a dramatic decorative outdoor gas lamp. The patent pending Tempest Torch creates a natural venturi without the use of electricity or a fan. This natural venturi effect causes the flame to spiral and dance within the tempered glass walls.

Created as a decorative outdoor furnishing for a wide array of exterior settings and applications, the Tempest Torch is designed to be the ultimate in lighting enhancement. The display possibilities are nearly endless: outdoor living spaces, retail or business store fronts, front walkways and lighting pool areas. They can be mounted onto movable bases, permanent post, pillars or on an exterior wall by an entry.

The Tempest Torch is available in both manual light or IPI electric ignition models. The manual light model works with a built-in Piezo igniter. The electric IPI model allows you to install up to 25 torches on a single 15 amp circuit. Electric IPI torches can be used with remote control, programmable timers or wired into a SmartHome system.

Installation Options

The Tempest Torch include a gas valve, burner, igniter, glass panels and frame and are available in NG or LP.

You have the option to install the Tempest Torch as:

- Wall Mount, for entry ways and sides on building
- Deck Mount Post, for installation on decks (94" tall)
- In Ground Post, for installation in ground (buried)
- Pillar Mount, for columns or pedestals (6" tall)



Easy access control panel with Piezo igniter for easy lighting and high to low flame control. IPI version does not have the control panel.

- Tempered glass (easily removed for cleaning)
- Durable stainless steel frame and burner
- Automatic gas shut off if flame goes out
- Easy access control panel
- Electric IPI or Piezo igniter models
- Wet weather lighting port
- Single On/Off and flame height control
- Natural Gas or Propane models
- Automatic tip-switch shut-off on Portable Model
- Rain Cap (optional to use)
- Optional Cast Post Cover
- Optional All Weather Cover

DECK INSTALLATION Shown with Cast Post Cover


12

WALL MOUNT INSTALLATION

R

POST & WALL MOUNT INSTALLATIONS Eddie V's Prime Seafood Restaurant in Orlando, Florida Installation by Southeast Steel Appliance Sales

PILLAR MOUNT INSTALLATION Installation at Lake Okanagan, BC waterfront home by Okanagan Fireplace Den

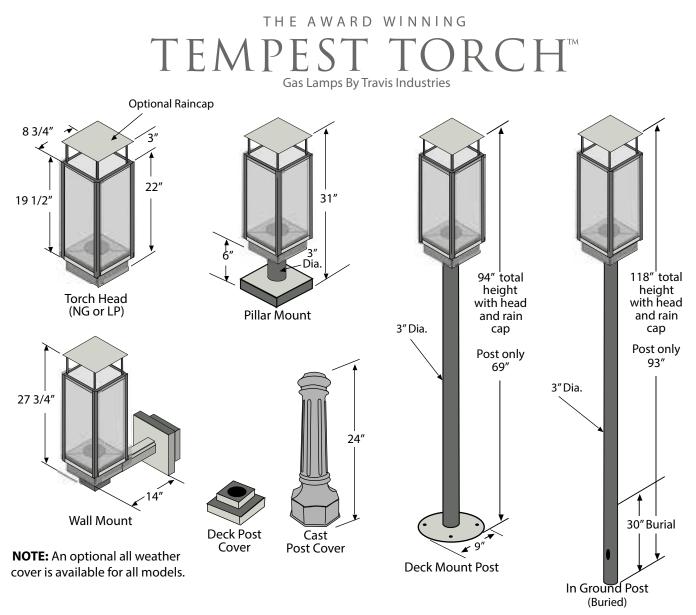

Minimum Clearances To Combustibles

<u>Floor</u>: 2.5" combustible floor to bottom (base) of torch <u>Walls:</u> 8" measured from glass surface <u>Ceiling:</u> 26" measured from the torch top (glass frame) with or without the raincap. (Refer to the Owner's Manual for further details)

Gas Rating	NG	LP
Input Rating	20,000 High	20,000 High
(Btu/hr)	14,000 Low	17,000 Low

Testing

Applicable portions of ANSI Z21.42a-2004 "Illuminating Appliances", CAN 1-2.15, CSA 4.96 U.S. (3rd Ed) "Outdoor Gas Fireplace", and AGA 8-96, "Requirement for Gas-Fired Decorative Illuminating Appliances for Outdoor Installation."

FOR YOUR SAFETY:

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

WARNING:

Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Refer to the owner's information manual provided with this appliance. For assistance or additional information consult a qualified installer, service agency or the gas supplier.



98800075 Copyright © 2015/02 T. I. We reserve the right to improve our products at anytime without prior notification. Photos and illustrations are for descriptive purposes only.