



48" Direct Vent Gas Fireplace

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE
MEZZO48	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	47-1/2 x 12-1/2
	58	60-1/4	58	60-1/4	41-3/4	42	17-1/8	18-1/4	

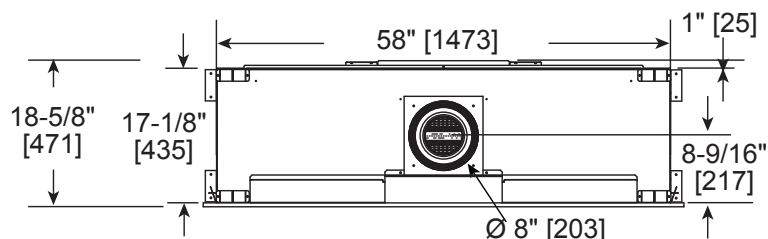

CENTERED ON APPLIANCE

Top

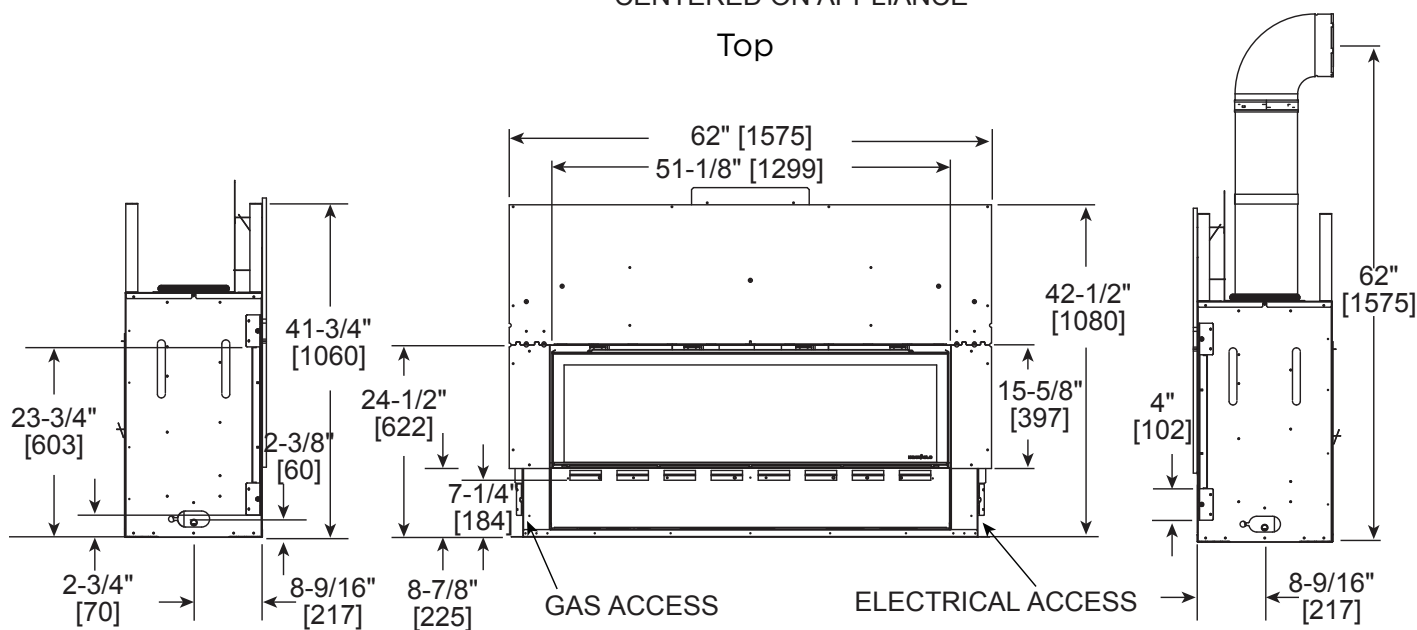


Left


Front

Right


FRONT DIMENSIONS

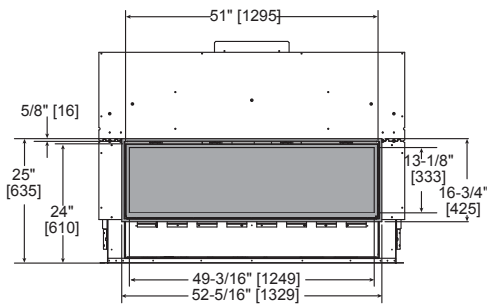

Clean Face Trim

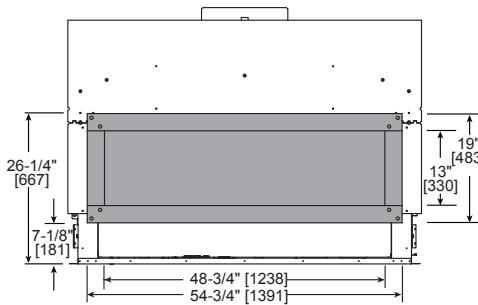



Loft Forge Front

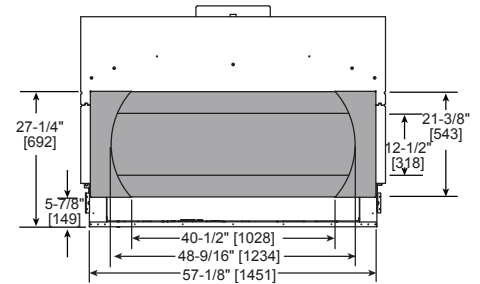


Quattro Front

- Rectangular holes on bottom of access panel should be covered.
- Approved for 0"-4" finishing material on inside fit method
- If finishing materials are 0"-1" thick, the outer trim ring should be adjusted out so that the trim ring overlaps the finishing material. This is intended to provide the cleanest look.
- If finishing materials are 1-4" thick, install the trim ring all the way in. Finishing materials may not extend past the outside edge of the trim ring.
- Rectangular holes on bottom of access panel must be exposed.
- ONLY approved for 0"-1" finishing material on overlap fit method
- Rectangular holes on bottom of access panel must be exposed.
- ONLY approved for 0"-1" finishing material on overlap fit method


FINISHED OPENING DIMENSIONS

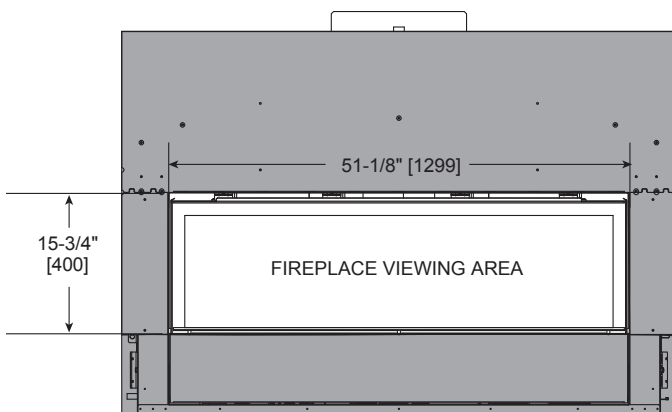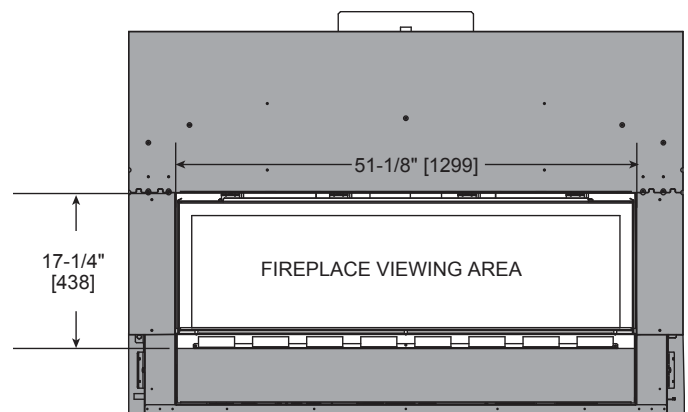Inside Fit Method
(Clean Face Trim)Overlap Fit Method
(Loft Forge, Quattro)


APPLIANCE LOCATION

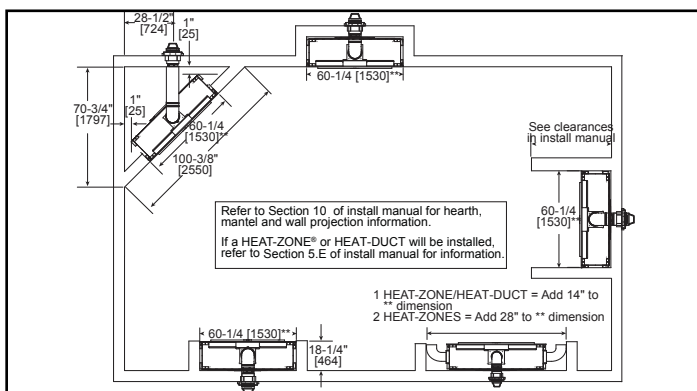


WALL PENETRATION

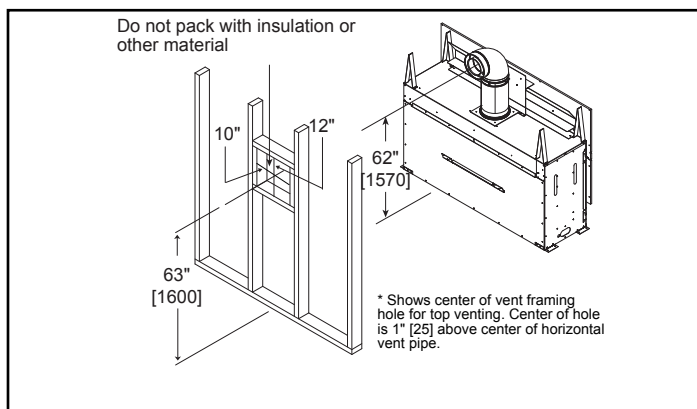


MANTEL PROJECTIONS - COMBUSTIBLE

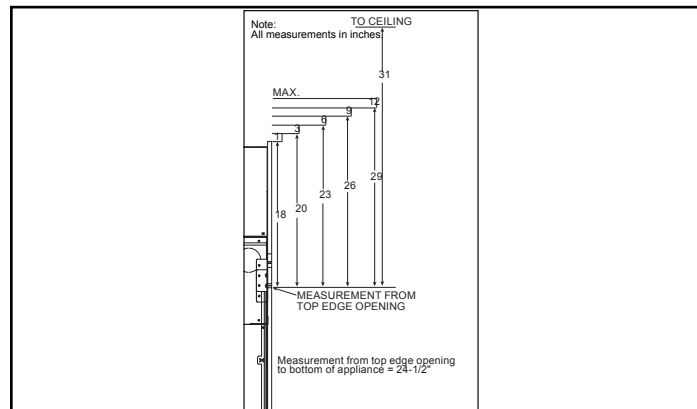


MANTEL PROJECTIONS - NON-COMBUSTIBLE

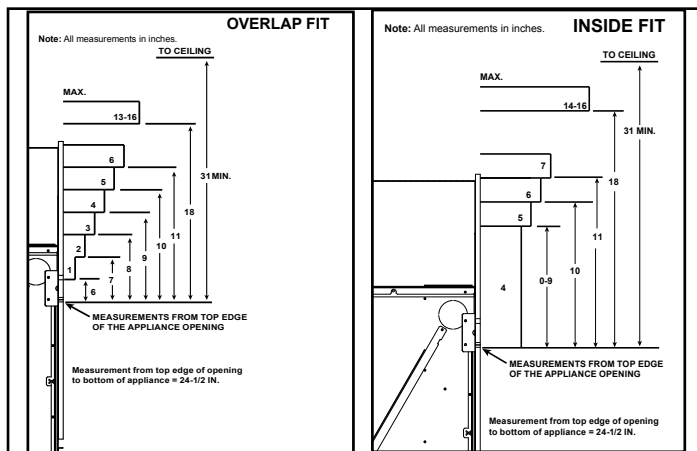


FRAMING DIMENSION

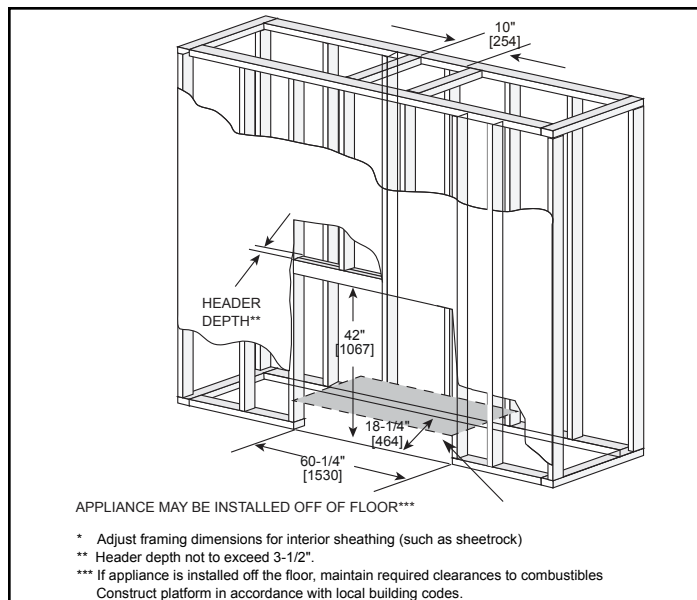

CLEARANCES TO COMBUSTIBLES

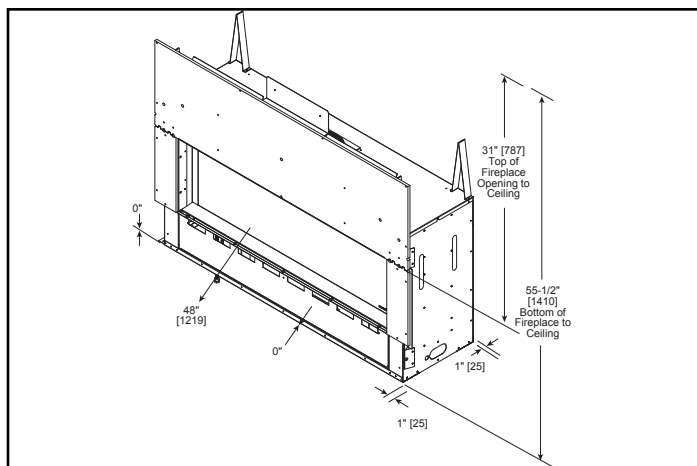

MANTEL LEG/WALL PROJECTIONS

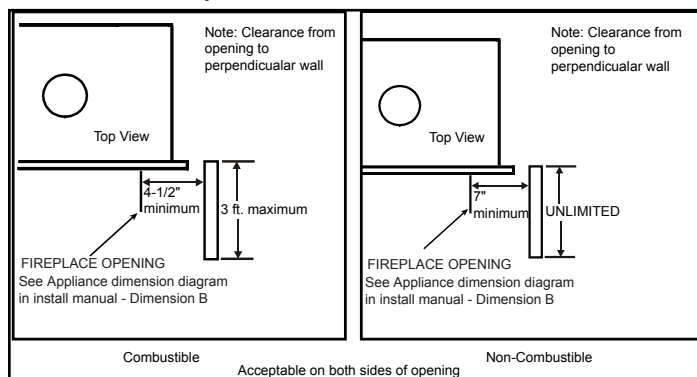

PRODUCT LISTING CODES

US	ANSI Z21.88-2014
CAN	CSA 2.33-2014
US LISTED	UL307B

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatnglo.com